

PRODOTTO

WALLBOX BE-W WEB-NET 1 SOCKET T2 22kWLAN

205.W74-D0

Wall mounting box in halogen free plastic with 1 socket Type 2 32A 400Vac 22kW with plug lock in compliance with IEC/EN 62196-2.

Suitable for charging electric vehicles in «mode 3» in compliance with IEC/EN 61851-1.

Equipped with RFID Card reader for user identification and management.

Version for home charging in absolute safety.

Exclusive design with «dual Feel Sensitive» finish with the possibility for personalisation, made of special technopolymer highly resistant to UVA rays.

High degree of protection against dust and water.



FEATURES

- Charge in mode 3 with pwm circuit pilot
- Identification of connected cord-set size
- Protection against direct contact Safety Child Shutters
- Energy metering and current consumption
- Identification of authorized user
- Managing of latching system
- Charge managing in case of power outage
- Working in mode stand-alone free or personal
- Predisposition for serial communication
- Interfacing with OCPP Central Station


EQUIPMENT

- 1 terminal strip 5x10mm²
- 1 modular contactor 4P 40A 24Vdc
- 1 DC Leakage detector
- 1 fuse holder 1P+N gG 4A
- 1 power supply 24Vdc 36W
- 1 control card
- 1 lcd display 2x20 rows backlight
- 1 reader RFID 13,56MHz
- 1 RGB led stripes
- 1 stop charge push-button (mode free)
- 1 local server wired with OCPP 1.6J protocol
- 1 backup battery
- 1 digital energy meter MID 3P+N 80A

EXCLUDED

- 1 circuit breaker 3P+N C40 30mA ist. A

SIZE

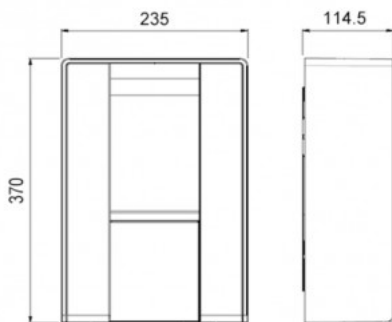

TECHNICAL SPECIFICATIONS

PROTECTION DEGREE IP	IP54
WORKING FREQUENCY	50/60Hz
COLOUR	GREY
WORKING TEMPERATURE	-25°C/+40°C
MOUNTING VERSION	SURFACE MOUNTING
SYNTHETICAL DESCRIPTION	WALL BOX 1 SOCKET TYPE 2
GLOW WIRE	GW 650°C
PROTECTION DEGREE IK	IK08
RATED VOLTAGE	400V

Rated Voltage	400V
POLES	3P+N+E
RATED CURRENT	32A
EV STANDARD	Type 2 3P+N+E 32A 400V~ 22kW
COMMERCIAL SERIES	BE-W Series
MATERIAL	ENGINEERING PLASTIC
DIMENSIONS	235x370x115mm